


## Floor Scale, Mild Steel

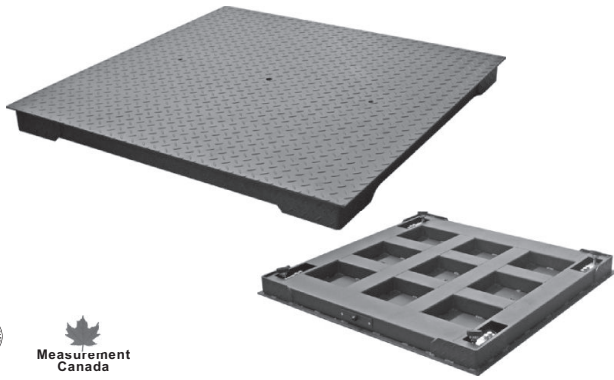


### Features:

- Heavy-duty industrial design
- Rigid steel channel frame
- Pre-trimmed corners
- Threaded eyebolt holes for easy lifting
- Powder Coating

### Complete Set Includes:

- IP67 alloy steel load cells 563YH-23, OIML MAA & NTEP certified
- 4 swivel mild steel feet AMF-F with removable rubber base
- 2 eyebolts
- 1 IP67 aluminum junction box J04EA-16
- 1 level bubble

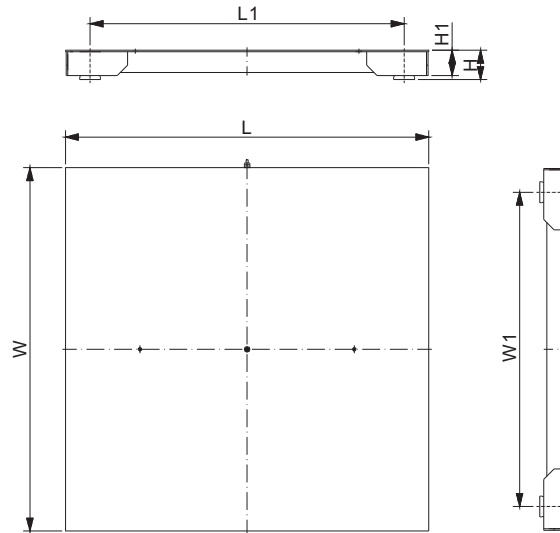

### DIMENSIONS


PLATFORM SIZE	H	H1	L	L1	W	W1
<b>mm</b>						
FSP3X3	103-117	85.0	914.0	750.0	914.0	750.0
FSP4X4	104-117	85.0	1219.0	1054.0	1219.0	1054.0
FSP5X5	109-122	86.0	1500.0	1300.0	1500.0	1300.0
FSP5X5-LE	122-128	86.0	1500.0	1300.0	1500.0	1300.0
FSP4X6	109-120	86.0	1219.0	1054.0	1830.0	1665.0
FSP5X7	109-120	86.0	1500.0	1300.0	2134.0	1934.0
FSP4X4-GI	104-117	85.0	1219.0	1054.0	1219.0	1054.0
<b>inches</b>						
FSP3X3	4.06-4.61	3.35	35.98	29.53	35.98	29.53
FSP4X4	4.09-4.61	3.35	47.99	41.50	47.99	41.50
FSP5X5	4.29-4.80	3.39	59.06	51.18	59.06	51.18
FSP5X5-LE	4.80-5.04	3.39	59.06	51.18	59.06	51.18
FSP4X6	4.29-4.72	3.39	47.99	41.50	72.05	65.55
FSP5X7	4.29-4.72	3.39	59.06	51.18	84.02	76.14
FSP4X4-GI	4.09-4.61	3.35	47.99	41.50	47.99	41.50


### DIMENSIONS

PART NUMBER	RATED CAPACITY	DIVISION	LOAD CELL CAPACITY	SIZE IN INCHES (W x L x H)	WEIGHT	DECK PLATE THICKNESS
<b>Painted Mild Steel</b>						
FSP3x3-500kg	500kg	0.1kg	563YH-23-300kg	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-1t	1t	0.2kg	563YH-23-500kg	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-2.5t	2.5t	0.5kg	563YH-23-1t	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-1Klb	1Klb	0.2lb	563YH-23-500lb	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-2Klb	2Klb	0.5lb	563YH-23-1Klb	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP3x3-5Klb	5Klb	1lb	563YH-23-2.5Klb	36" x 36" x 4"	72kg /159 lb	0.20" / 5mm
FSP4x4-500kg	500kg	0.1kg	563YH-23-300kg	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-1t	1t	0.2kg	563YH-23-500kg	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-2.5t	2.5t	0.5kg	563YH-23-1t	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-5t	5t	1kg	563YH-23-2t	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-1Klb	1Klb	0.2lb	563YH-23-500lb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-2Klb	2Klb	0.5lb	563YH-23-1Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-5Klb	5Klb	1lb	563YH-23-2.5Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-10Klb	10Klb	2lb	563YH-23-4Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP5x5-2.5t	2.5t	0.5kg	563YH-23-1t	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-5t	5t	1kg	563YH-23-2t	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-5Klb	5Klb	1lb	563YH-23-2.5Klb	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-10Klb	10Klb	2lb	563YH-23-SE5Klb	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-10Klb-LE	10Klb	2lb	563YH-23-5Klb	59" x 59" x 5"	210kg/463 lb	0.24" / 6mm
FSP4x6-2.5t	2.5t	0.5kg	563YH-23-1t	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP4x6-5t	5t	1kg	563YH-23-2t	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP4x6-5Klb	5Klb	1lb	563YH-23-2.5Klb	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP4x6-10Klb	10Klb	2lb	563YH-23-SE5Klb	48" x 72" x 4"	180kg/397 lb	0.24" / 6mm
FSP5x7-2.5t	2.5t	0.5kg	563YH-23-1t	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
FSP5x7-5t	5t	1kg	563YH-23-2t	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
FSP5x7-5Klb	5Klb	1lb	563YH-23-2.5Klb	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
FSP5x7-10Klb	10Klb	2lb	563YH-23-SE5Klb	59" x 84" x 4"	260kg/573 lb	0.24" / 6mm
<b>Hot Dip Galvanized Mild Steel</b>						
FSP4x4-5Klb-GI	5Klb	1lb	563YH-23-2.5Klb	48" x 48" x 4"	138kg/304 lb	0.20" / 5mm

### OPTIONAL ACCESSORIES

- Indicators (page 184-187)
- Ramps-17 (page 211)
- Bumper Guards (page 212)
- Scale Base Mounting Plate (page 219)

 Measurement Canada Approval for  
- 3X3-5Klb - 4X4-5Klb - 5X5-5Klb

 NTEP 1:5 000 Class III Approval for  
- 3X3-1Klb - 4X4-1Klb - 5X5-1Klb  
- 3X3-2Klb - 4X4-2Klb - 5X5-2Klb  
- 3X3-5Klb - 4X4-5Klb - 5X5-5Klb  
- 3X3-10Klb - 4X4-10Klb - 5X5-10Klb

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.