

OCSM Series

FEATURES


- Fast resolution switching
- LED display 5 digits 1.2inch (30mm)
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb (lb unit annunciator will turn on if lb is selected, will turn off if set to kg)
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

OPTION

- LCD display version, model OCSM2



CRANE SCALE

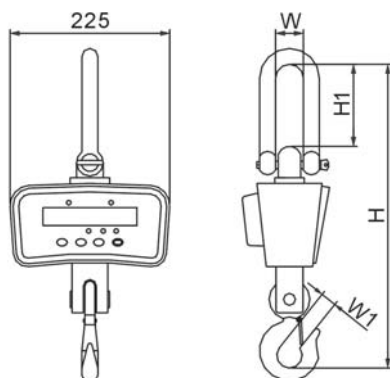

Model	OCSM1
Type	Light
Accuracy Class	Following OIML R76,
Enclosure	Class III, NOT certified
Capacity Available	Die-casting aluminum
Battery Life	200/400/600/1000/2000lb
High Quality Load Receptor	80Hours
Shackle	Alloy Steel
Hook	Stainless Steel
High Capacity Rechargeable Battery	Rotatable
Infrared Remote Control	Yes 6V/5Ah
	Yes

Rated Capacity	Division	H	H1	W	W1	N.W.	G.W.
200lb/100kg	0.1lb/0.05kg	350mm/13.8"	80mm/3.1"	20mm/0.8"	24mm/0.9"	4.1kg/9lb	5.2kg/11lb
400lb/200kg	0.2lb/0.1kg	350mm/13.8"	80mm/3.1"	20mm/0.8"	24mm/0.9"	4.1kg/9lb	5.2kg/11lb
600lb/300kg	0.2lb/0.1kg	350mm/13.8"	80mm/3.1"	20mm/0.8"	24mm/0.9"	4.1kg/9lb	5.2kg/11lb
1Klb/500kg	0.5lb/0.2kg	370mm/14.6"	85mm/3.3"	25mm/1.0"	36mm/1.4"	4.3kg/9lb	5.6kg/12lb
2Klb/1t	1lb/0.5kg	370mm/14.6"	85mm/3.3"	25mm/1.0"	36mm/1.4"	4.3kg/9lb	5.6kg/12lb

*Dimensions and specifications are subject to change without notice.