


Floor Scale, Mild Steel



Dual Access to Junction box - from Top & Side:

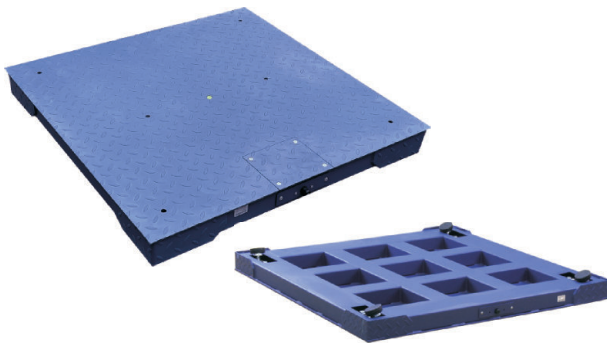


Features:

- Dual access to junction box - from Top & Side
- Heavy-duty industrial grade design
- Ultra Rigid steel honeycomb channeled frame
- Pre-trimmed corner adjustment per OIML & NTEP
- Threaded eye-bolt holes for easy lifting/transport
- Powder coated for maximum surface protection
- Re-enforced steel corner plate protection

Complete Set Includes:

- IP67 alloy steel load cells 563YH-23, OIML MAA & NTEP certified
- 4 swivel mild steel feet AMF-F with removable rubber base
- 2 eyebolts
- 1 IP67 aluminum junction box J04EA-16
- 1 level bubble

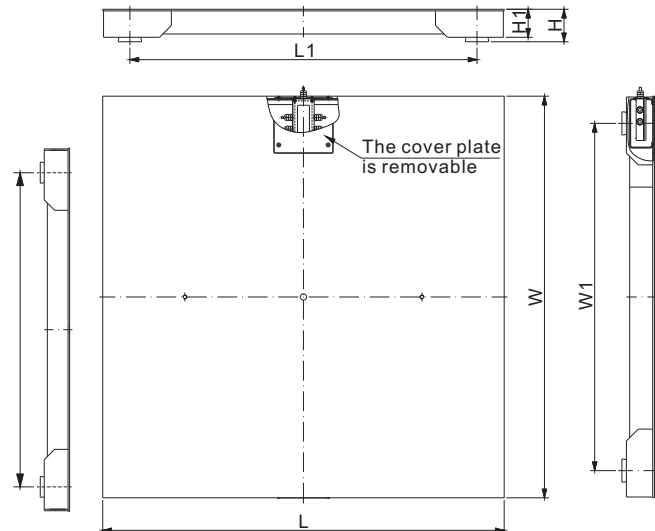

DIMENSIONS

PLATFORM SIZE	H	H1	L	L1	W	W1
mm						
FSP4X4-TA	104-117	85.0	1219.0	1054.0	1219.0	1054.0
inches						
FSP4X4-TA	4.09-4.61	3.35	47.99	41.50	47.99	41.50

DIMENSIONS

PART NUMBER	RATED CAPACITY	DIVISION	LOAD CELL CAPACITY	SIZE IN INCHES (W x L x H)	WEIGHT	DECK PLATE THICKNESS
Painted Mild Steel						
FSP4 x 4-5Klb-TA	5Klb	1lb	563YH-23-2.5Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm

OPTIONAL ACCESSORIES

- Indicators (page 184-187)
- Ramps-17 (page 211)
- Bumper Guards (page 212)
- Scale Base Mounting Plate (page 219)



Measurement Canada Approval for:
Capacity: 1Klb to 5Klb;
Platform size: 3ft X 3ft to 5ft X 5ft



NTEP 1:5 000 Class III Approval for
Capacity: 1Klb to 10Klb;
Platform size: 3ft X 3ft to 5ft X 5ft

www.anyload.com

© 2024 ANYLOAD V1 dimensions and specifications subject to change without notice

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.